

Not to scale.



MATERIAL SPECIFICATIONS

Polypropolene


PRODUCT DESCRIPTION

1-3/4" diameter, white washer. Use with Grip-Deck® screws / fasteners to attach rigid insulation, commercial building wrap, EIFS (PM) systems, metal / fiberglass lath, or for stucco applications (keyholes for cementitious basecoat embedment).

APPROPRIATE ACCESSORIES

Use with Grip-Lok® Autofeed Fastening System with 1-3/4" diameter Bullseye® nose adaptor for rapid attachment.

PRODUCT SPECIFICATIONS

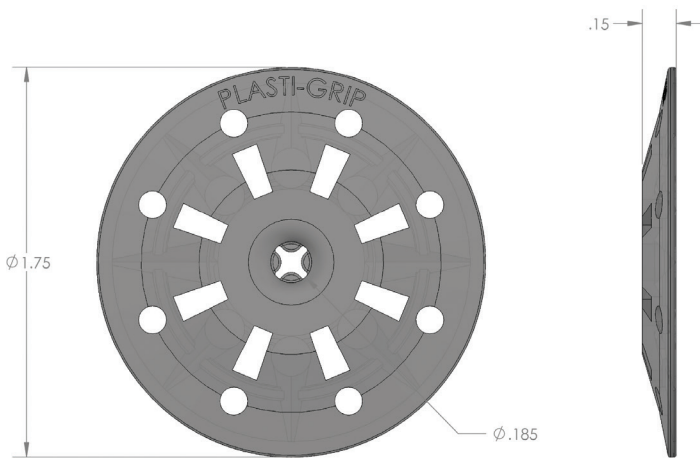

Basis of Design: Plasti-Grip CBW Washers as manufactured by TRUFAST®.

Application: Multi-use fasteners to attach rigid insulation, commercial building wrap, EIFS (PM) systems, metal, or fiberglass lath, or for stucco applications.

Description: Washers only, not pre-assembled with screws.

- a. 1-3/4" inches (44 mm) diameter, tapered, white washer with keyholes for base coat bonding in EIFS or stucco.
- b. Flexible perimeter reduces tearing of building wraps and insulation.
- c. Flat bottom for flush mounting.
- d. Made in USA.

PRODUCT SELECTION

Part No.	Part Description	Pkg. Qty.	Pkg. Wt.
PGCBW-1750	1-3/4" Plasti-Grip CBW washer	1000	5.6 lbs.

PRODUCT FEATURES

- 1-3/4" diameter.
- Flat bottom for flush mounting.
- Flexible perimeter reduces tearing.
- Use with Grip-Deck® screws / fasteners to attach rigid insulation, commercial building wrap, EIFS (PM) systems, or fiberglass lath.
- Made in USA.
- Patented and/or patent pending.



INSTALLATION GUIDELINES

- Pre-assemble with appropriate screw type and length for application.
- Install and tighten screw until washer is compressed tight to wrap or insulation (depending on application). Do not overdrive screw through washer.
- Follow wrap or insulation manufacturer's installation instructions regarding proper fastener spacing.



Shown pre-assembled with screw. Screws sold separately.

Bulletin No. TFW-24021

DISCLAIMER

The information provided here is subject to change without notice. The performance specifications published in this TRUFAST® product literature are based on controlled laboratory tests and are intended as a guideline only. They are not guaranteed in any way by the ALTENLOH, BRINCK & CO. US, INC., since building design, engineering,

and construction, including workmanship and materials, are beyond the control of the manufacturer. The manufacturer recommends that pull-out tests be conducted to verify the substrate provides adequate pull-out values.